


Features & Benefits


With a lowering distance of up to 14 feet and a weight capacity of up to 160 lbs., the DL3B Series Projector Lifts are the perfect solution for auditoriums, boardrooms, or virtually any room with a high ceiling.

- Lowering distances: 7.5'-14'
- Weight capacity: 160 lbs.
- Three positions: stowed, show, service
- For projectors or flat panel displays
- Position repeatable to better than 1/16"
- Cable management system
- Whisper quiet operation
- Includes programmable wired hand-held remote
- Accessories: optional controls-RS232, IR, RF, optional closure styles for finished or grid tile, plenum enclosures, and cable pre-wire package

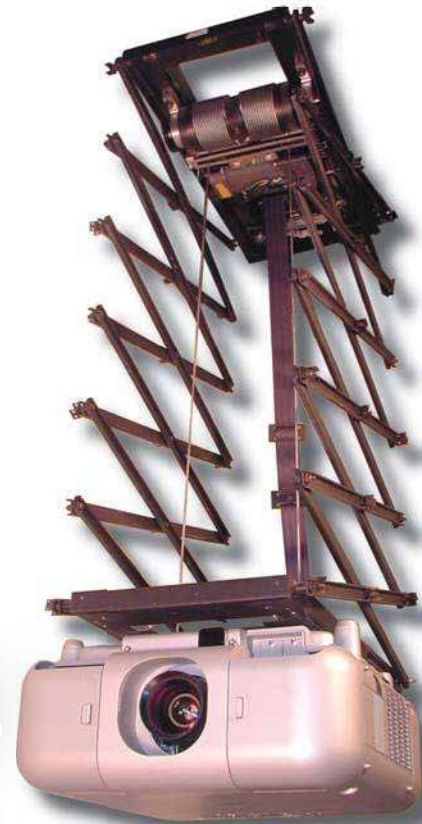

Lift only - no projector or ceiling closure system

DL3 B-7.5	17.5"w	x 28.5"l	x 6.75"h	92 lbs.
DL3 B-9.5	17.5"w	x 28.5"l	x 7.75"h	97 lbs.
DL3 B-11	17.5"w	x 28.5"l	x 8.75"h	102 lbs.
DL3 B-12.5	17.5"w	x 28.5"l	x 9.75"h	107 lbs.
DL3 B-14	17.5"w	x 28.5"l	x 10.75"h	112 lbs.

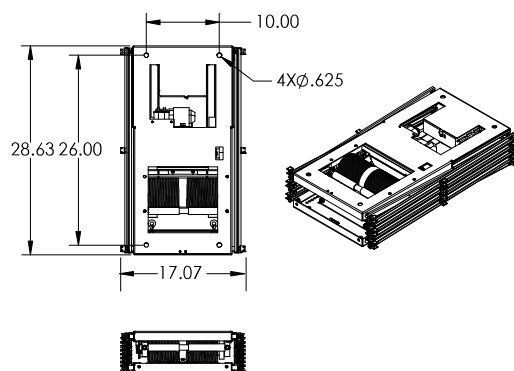

All ceiling closures are built to the smallest dimension possible.
Contact Sales for dimensional drawings of your specific projector / installation.

Model	Lowering Distance
-------	-------------------

- | | |
|--------------|-----------|
| • DL3 B-7.5 | 7.5 feet |
| • DL3 B-9.5 | 9.5 feet |
| • DL3 B-11 | 11 feet |
| • DL3 B-12.5 | 12.5 feet |
| • DL3 B-14 | 14 feet |

- Contact closure operation- 12V trigger in / out
- Power requirements:
110V, 1.2 amp; 220V, 0.6 amp
- Safety belt for earthquake standards
- Digital electronics with self diagnostics
- User-programmable show / service positions
- Specify projector / lens for proper mount / closure
- Requires Display Devices mount adapter
- 1 year warranty

Metric conversion: inches x 25.4

Drawings & Specifications

www.DisplayDevices.com
sales@DisplayDevices.com

DISPLAY DEVICES
Design • Engineering • Manufacturing

Phone: 877-862-6865
Fax: 303-327-7320

Model #	DL3B Series Projector Lifts Options and Accessories
xxx	Mounting Adapter interface for projector. Must specify make and model number of projector and lens if projector offers lens options.
OPT-1	Ceiling Closure Frame. Used with drywall or wood ceilings. Provides 2" trim finish for projector opening. Spring loaded and fully adjustable. <u>Note:</u> EBR is recommended for installations with restricted access.
OPT-1L	Lipless Ceiling Closure Frame - Provides minimal seam around projector opening for drywall or wood ceilings. Spring loaded and fully adjustable. <u>Note:</u> EBR is recommended for installations with restricted access.
OPT-3	Plenum Rated Housing With Closure Frame - Enclosed support framework and closure frame for drop-tile ceilings with plenum requirements. 2" trim finish for projector opening. Includes ceiling closure, spring-loaded and fully adjustable.
OPT-3L	Plenum Rated Housing With Lipless Closure Frame. Enclosed support framework and closure frame for drop-tile ceilings with plenum requirements. Provides minimal seam around projector opening. Includes ceiling closure, spring- loaded and fully adjustable.
OPT-4	Non-Plenum Rated Framework w/ Closure Frame. Support framework and closure frame for drop tile ceilings with non-plenum requirements. 2" trim finish for projector opening. Includes ceiling closure, spring-loaded and fully adjustable.
OPT-4L	Non-Plenum Rated Framework w/ Lipless Closure Frame. Support framework and closure frame for drop tile ceilings with non-plenum requirements. Provides minimal seam around projector opening. Includes ceiling closure, spring-loaded and fully adjustable.
OPT-5	Bomb Bay Door ceiling closure system. Provides support framework and dual opening doors for non-plenum applications.
OPT-6	Bomb Bay Door ceiling closure system. Provides support framework and dual opening doors for plenum applications.
OPT-9	RS-232 Serial control interface - allows for unlimited show positions when using a third party control system (Crestron/AMX).
OPT-11A	Cable Pre-Wire of lift with control, signal and power cabling.
PCS-02	Power Current Sensor for projectors and Flat Panel Displays, 110V only.
REM-IR	Wireless Infrared Remote control. May be used with any motorized Display Devices product.
REM-RF	Wireless RF Remote control. May be used with any motorized Display Devices product.
WPR-L01-W	Wall Plate Wired Remote for all lifts. Single-gang white.
WPR-L01-B	Wall Plate Wired Remote for all lifts. Single-gang black.
WPR-L01-S	Wall Plate Wired Remote for all lifts. Single-gang brushed steel.
REM-L19-RM	Rack Mount Panel Remote wired control panel. 1.75" x 19" EIA. Black.
REM-L02-W	Locking Wall Plate Remote wired control panel with security key lock. 2-gang, white.
REM-L02-B	Locking Wall Plate Remote wired control panel with security key lock. 2-gang, black.
REM-L02-S	Locking Wall Plate Remote wired control panel with security key lock. 2-gang, brushed steel.
SPK-DL3B	Spare Parts Kit - (1) motor, (1) control box, (1) slot sensor, (1) slot sensor wheel, (1) wire harness, & (1) limit switch.
EBR	Emergency Brake Release - Lowers lift for service access. Recommended when access to a retracted lift is restricted i.e., drywall. Must be purchased at the same time as the lift.